

SL58

by Léon Stynen

Bulo







SL58

The SL58 Chair was designed for the 1958 World Expo in Brussels - the first major world's fair after World War II. The theme of Expo 58 was "Evaluation of the world, for a more humane world". The exhibits explored technical and scientific progress as well as debates on the ethical use of atomic power. The fair began with a call for world peace, and social and economic progress. This post-war period is well known for its architectural departures from past constraints, and in the furniture industry as a period of exploration with new materials, simple forms, and a new, modern way of living.

Bulo re-issued the most iconic and popular chair in Belgium, the SL58 chair, in 2018, to commemorate "the year of Léon Stynen". Working closely with the Stynen family, adhering to design tolerances and details, Bulo further expanded the SL Collection to include a padded seat, upholstered covers, bar stools, a desk chair on casters and a polypropylene version for indoor and outdoor use. Most recently, Bulo added to the collection with an outdoor upholstered SL chair. SL is Bulo's most iconic modern classic collection.

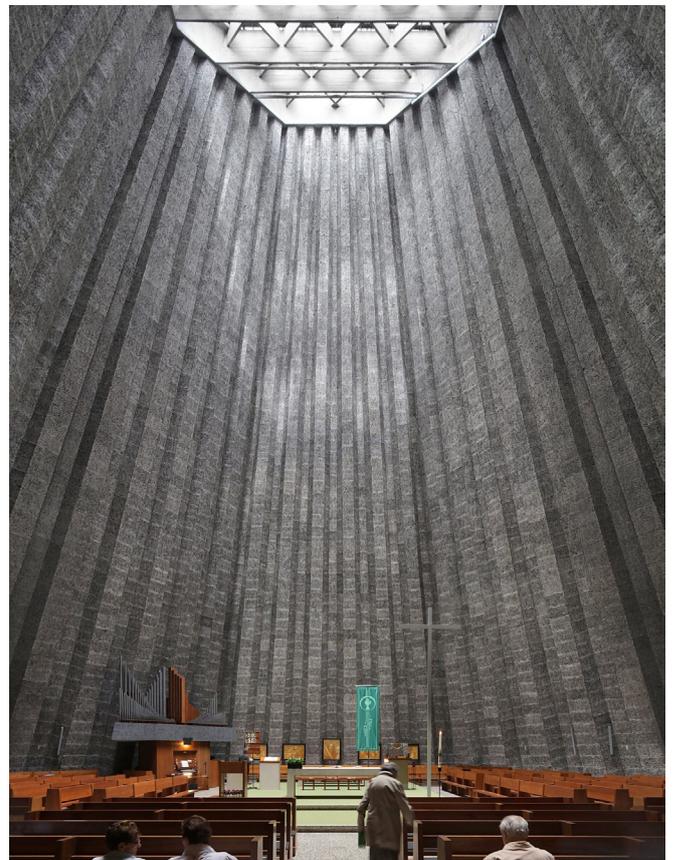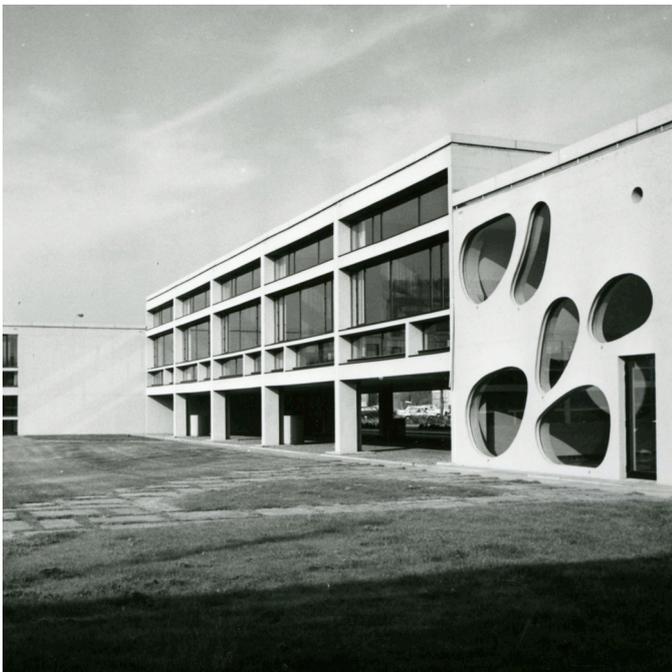

Léon Stynen

Léon Stynen (1899-1990), son of a sculptor and a decorative artist, studied architecture at the Antwerp Academy. His contemporaries included Bourgeois, De Koninck, Hoste, Van Doesburg, Gropius and Le Corbusier - who was a main source of inspiration and a dear friend. Stynen's work as an architect spans more than half a century of Belgian architectural history, with a vast number of successful and multi-faceted projects. Amongst them are deSingel International Art Center that opened in 1980. Stynen was also very active in education and had a role in defining the architectural studies in Belgium.

Léon Stynen was one of Belgium's most important and influential architects and educators. Working from 1920's to 1970, his masterworks still stand in Flanders today, reminding us of the development of Europe's Modern Architectural Style.

Content

Specifications	5
Types	6
Dimensions	7
Materials	9
Upholstery Fabrics	11
Upholstery Leather	15



SL58

on 4 legs



The molded plywood shell is composed out of FSC certified wood.

The shell consists of 8 layers of beech veneer (including 2 layers of AA-quality beech veneer) and is attached to the metal frame by means of black bolts and cap nuts.

Upholstery uses fire-retardant foam, CRIB5 (15 mm on seat, 45 kg / m3 density)

The water-based lacquers used meet the strictest european norms.


Steel is certified with ISO 9001:2015, ISO 14001:2015

For intensive use, it is recommended to use a chrome or champagne base.

SL58 on 4 legs

w	540 mm	± 21"
d	560 mm	± 22"
h	810 mm	± 32"

seat height		
481 mm		± 19"

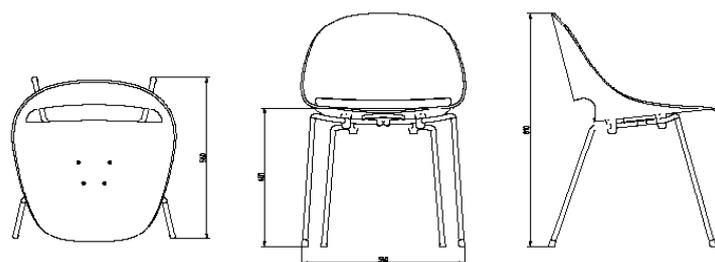

SL58 desk chair




The molded plywood shell is composed out of FSC certified wood.
The shell consists of 8 layers of beech veneer (including 2 layers of AA-quality beech veneer) and is attached to the metal frame by means of black bolts and cap nuts.
Upholstery uses fire-retardant foam, CRIB5 (15 mm on seat, 45 kg / m³ density)

The water-based lacquers used meet the strictest european norms.
Steel is certified with ISO 9001:2015, ISO 14001:2015
For intensive use, it is recommended to use a chrome or champagne base.

SL58 desk chair

w	570 mm	± 22.5"
d	570 mm	± 22.5"
h	770-900 mm	± 30.5-35.5"
seat height	420-550 mm	± 16.5-21.5"

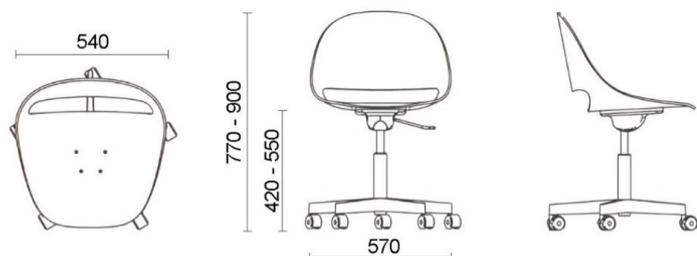

SL58

high bar stool



The molded plywood shell is composed out of FSC certified wood.

The shell consists of 8 layers of beech veneer (including 2 layers of AA-quality beech veneer) and is attached to the metal frame by means of black bolts and cap nuts.

Upholstery uses fire-retardant foam, CRIB5 (15 mm on seat, 45 kg / m3 density)

The water-based lacquers used meet the strictest european norms.


Steel is certified with ISO 9001:2015, ISO 14001:2015

For intensive use, it is recommended to use a chrome or champagne base.

SL58 high bar stool

w	540 mm	± 21"
d	600 mm	± 23.5"
h	1114 mm	± 44"

seat height		
782 mm		± 31"

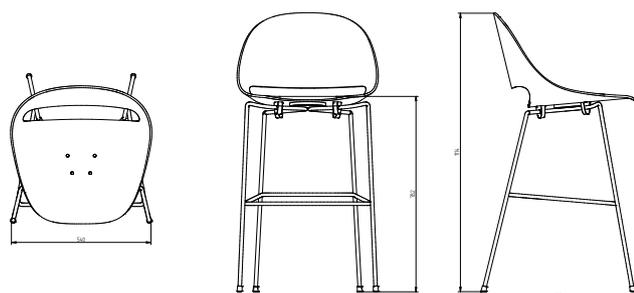

SL58

counter height stool



The molded plywood shell is composed out of FSC certified wood.

The shell consists of 8 layers of beech veneer (including 2 layers of AA-quality beech veneer) and is attached to the metal frame by means of black bolts and cap nuts.

Upholstery uses fire-retardant foam, CRIB5 (15 mm on seat, 45 kg / m3 density)

The water-based lacquers used meet the strictest european norms.

Steel is certified with ISO 9001:2015, ISO 14001:2015

For intensive use, it is recommended to use a chrome or champagne base.

SL58 counter height stool

w	535 mm	± 21"
d	540 mm	± 21"
h	970 mm	± 38"
seat height	645 mm	± 25.5"



SL58

lounge chair



The molded plywood shell is composed out of FSC certified wood.

The shell consists of 8 layers of beech veneer (including 2 layers of AA-quality beech veneer) and is attached to the metal frame by means of black bolts and cap nuts.

Upholstery uses fire-retardant foam, CRIB5 (15 mm on seat, 45 kg / m³ density)


The water-based lacquers used meet the strictest european norms.

Steel is certified with ISO 9001:2015, ISO 14001:2015

For intensive use, it is recommended to use a chrome or champagne base.

SL58 lounge chair

w	535 mm	± 21"
d	575 mm	± 22.5"
h	705 mm	± 28"
seat height	410 mm	± 16"

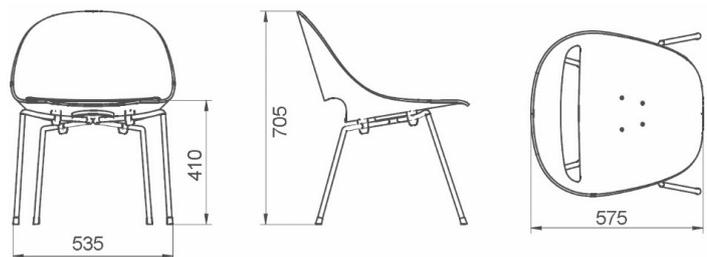

Materials

Base



Lily White Powder Coated (only for chair on 4 legs) 01



Black Powder Coated 04



Champagne (brass, only for chair on 4 legs) 17



Chrome CH

Plywood Shell



Natural Beech




stained in Santos Rose Wood color

Upholstery Fabrics

César

Category 1

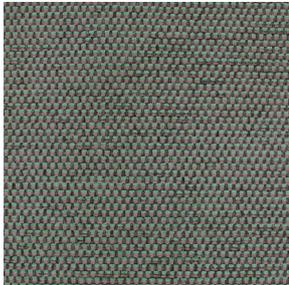

Textile mill Aristide

Composition 100% PES

Weight 565 gr/rm

Abrasion Martindale 60,000 rubs (BS 5690)

Light resistance 4

Flammability BS5852, ignition souce 0 & 1 (cigarette & match), EN1021, EN1021-1 (cigarette) & EN1021-2 (match)

Aquaclean Aquaclean treatment system covers every single fiber with an invisible molecular coating. This avoids dirt to penetrate the fibers, which helps to maintain the fabric and prolong the life of your sofa cover. Use just water to clean occasional stains like wine, coffee and food.

Duffy

Category 1



Textile mill Limonta

Composition 65% Lino, 25% Lana, 10% Ny

Weight 535 g/m²

Fastness to crocking UNI EN ISO 105-X12 (Dry: 4/5, Wet: 3)

Pilling 4, ISO 12945-2


Fastness to light 4/5, UNI EN ISO 105-B02

Flammability BS 5852/90 sez 4



Extrema AU

Category 1

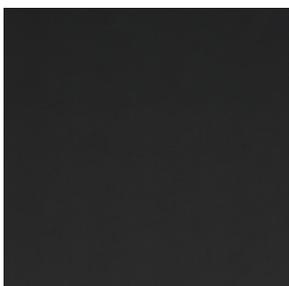

Textile mill Flukso

Composition: 63% Polyurethane - 29% COT 8% Polyester

Weight: 480 g/m²

Abrasion: 150.000 Martindale rubs, ISO 12947-2

Fastness to light: 5/6, IISO 105-B02

Flammability UNI 9175 classe 1 IM, EN 1021 part. 1-2, BS 5852 crib 5, BS 5852

Source 1, IMO 2010 FTP CODE | TB 117: 2013



Upholstery Fabrics

Pépé

Category 1



Textile mill Rohi

Composition CO 75% PL 25%

Weight 720 gr/Mtl

Abrasion 50,000 cicli UNI EN ISO 12947-2

Fastness to light 5/6, UNI EN ISO 105-B02

Pilling 3/4 5000 rubs, ISO 12945-2

Flammability Cigarette test BS 5852:1990 sez 4 part.1



Ronny

Category 1



Textile mill Imatex

Composition 49% wool, 34% cotton, 17% nylon

Weight 500g/lin.m

Abrasion 50.000 Martindale rubs, ISO 12945

Pilling 4, ISO 12945

Fastness to light 5, ISO 105-B02

Flammability BS 5852 Cigarette test, EN 1021-1 Cigarette test, EN 1021-2 Match test



Tresigallo

Category 1



Textile Mill Limonta

Composition PC 22% WV 22% PL 22% VI 14% CO 13% LI 7%

Bouclé/loop pile fabric

Weight 834 g/lm

Abrasion 30.000 Martindale ISO 12947-2

Pilling 4 5000 rubs ISO 12945-2

Fastness to light 5/6 ISO 105-B02

Flammability BS Cigarette - TB 117 California

Upholstery Fabrics

Comeback

Category 2




Textile Mill Keymer
Composition 86% PL, 9% CO, 5% MA
Abrasion 200.000 Martindale
Fastness to light 6
Flammability EN1021 1 & 2

All colorways available

Credo

Category 2

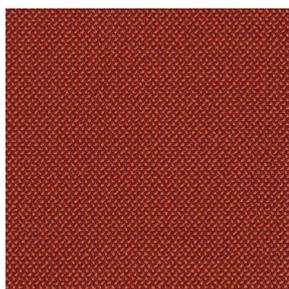

Textile mill Rohi
Composition 95% New Wool, 5% PA (polyamide)
Weight 610 g/m² - 870 g/lfm
Abrasion 100.000 rubs, ISO 12947-2
Pilling ≥ 4-5, ISO 12945-2
Fastness to light ≥ 5, ISO 105-B02
Flammability FAR 25.853 (12 sec. vertical), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 und -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), NF P92 503-507 M2, IMO: 2014/90/EU Marine Equipment Directive

All colorways available

Lane

Category 2




Textile mill Aristide
Composition 100%PES (velvet)
Weight 406 g/rm
Abrasion 50.000 rubs
Pilling 5
Fastness to light 6/7
Flammability BS5852, ignition source 0 & 1 (cigarette & match), EN1021, EN1021-1 (cigarette) & EN1021-2 (match) Crypton technology stain and odor resistant, integrated non-porous moisture barrier, protection against bacteria and odor causing microbes, using silver ion technology, disinfectable, permanent and patented protection engineered on a molecular level, Greenguard Gold certified.

All colorways available

Upholstery Fabrics

Main Line Flax

Category 2

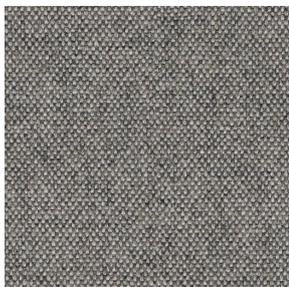

Textile mill Camira fabrics

Composition 70% Pure New Wool, 30% Flax

Weight 13 oz/sq yd

Abrasion \geq 100,000 double rubs, ASTM D4157 Wyzenbeek method


Fastness to light 4, AATCC-16 (40 hours)

Flammability California Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard, ASTM E84 Class 1 or A (Adhered)

All colorways available

Meld

Category 2

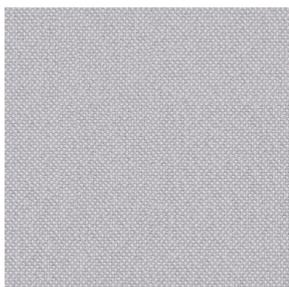

Textile mill Maharam

Composition 68% Post-Consumer Recycled Polyester, 32% Polyester

Finish Stain repellent

Weight 500 g/lm

Abrasion ASTM D4157, 100,000 double rubs Wyzenbeek

Fastness to light AATCC 16E, 40+ hours

Flammability AS/NZS 1530.3, AS/NZS 3837 Unadhered, ASTM E 84 Unadhered, CAL 117-2013, CAN ULC S102 Unadhered

Environmental Greenguard Gold Certified, Greenguard Certified, GRS Certified Content, REACH Compliant, Contains Recycled Content, FR Free

All colorways available

Remix 3

Category 2



Textile mill Kvadrat

Composition 90% new wool worsted 10% nylon

Weight 420 g/lm

Abrasion 100.000 Martindale

Pilling 4

Fastness to light 6


Flammability AS/NZS 1530.3, BS 5852 part 1, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, UNI 9175 1IM, US Cal. Bull. 117-2013, EN 1021-1/2, AS/NZS 3837 class 2, ÖNORM B1/Q1, ASTM E84 Class A Unadhered, ASTM E84 Class A Adhered

All colorways available

Upholstery Fabrics

Re-wool

Category 2

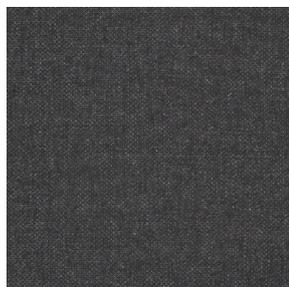

All colorways available

Textile mill Kvadrat

Composition 5% New wool (worsted), 45% Recycled wool, 10% Nylon

Weight 540 g/lin.m

Sustainability Complies with EU ecolabel "The Flower"

Abrasion 100.000 Martindale

Pilling 4

Fastness to light 7

Flammability BS 5852 Crib 5 with treatment, BS 5852 ignition source 3, BS 5852 part 1, EN 1021-1/2, NF D 60 013, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, AS/NZS 3837 Class 2

Shake

Category 2



All colorways available

Textile mill Rohi

Composition 95% WV 5% PA

Weight 440 g/m² - 660 g/lm

Abrasion ≥ 70.000 rubs ISO 12947-2


Pilling ≥ 4-5 , ISO 12945-2

Fastness to light ≥ 5, ISO 105-B02 (yarn dyed)

Flammability CAL TB 117 - 2013, DIN EN 1021 -1 / -2, BS 5852:1979 (part1), UNI 9175 (1 IM), ÖNORM B1/Q1, IMO 2014/90/EU Marine Equipment Directive.

Topia

Category 2

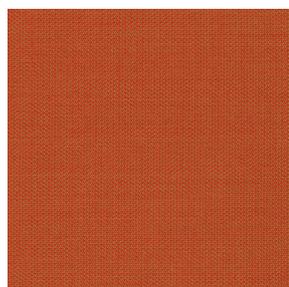

All colorways available

Textile mill Rohi

Composition 95% Wool, 5% PA

Weight 440 g/m² - 660 g/lfm

Abrasion 50.000 rubs, ISO 12947-2

Pilling ≥ 4-5, ISO 12945-2


Fastness to light ≥ 5, ISO 105-B02

Flammability FAR 25.853 (12 Sek. vertikal), CAL TB 117 - 2013, DIN 4102-1 B2, DIN EN 13501-1, DIN EN 1021 -1 and -2, BS 5852:1979 (part1), BS 5852:2006 (part2) Crib5, BKZ: 5.3 SN 198898, UNI 9175 (1 IM), IMO: 2014/90/EU Marine Equipment Directive, Train: EN 45545-2 R21 ISO 5660-1 (HL3)

Upholstery Fabrics

Blazer

Category 3

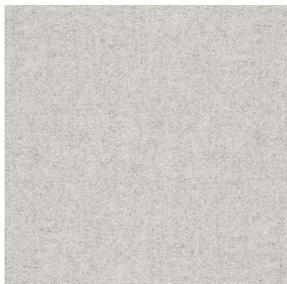

All colorways available

Textile mill Camira fabrics

Composition 100% Pure New Wool

Weight 13 1/2 oz/sq yd

Abrasion ≥75,000 double rubs, ASTM D4157 Wyzenbeek method

Fastness to light 4, AATCC-16 (40 hours)

Flammability California Technical Bulletin 117 - 2013, NFPA 260 + UFAC Class 1, BS 7176 Low Hazard, ASTM E84 Class 1 or A (Adhered)

Canvas 2

Category 3



All colorways available

Textile mill Kvadrat

Composition 90% New wool (worsted), 10% Nylon

Weight 480 g/lin.m

Abrasion 100.000 Martindale


Pilling 4

Fastness to light 6

Flammability AS/NZS 1530.3, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 ignition source 3, BS 5852 Crib 5 with treatment

Hallingdal 65

Category 3

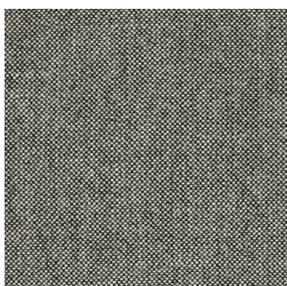

All colorways available

Textile mill Kvadrat

Composition 70% New wool, 30% Viscose

Weight 795 g/lin.m

Sustainability Complies with EU ecolabel "The Flower"

Abrasion 100.000 Martindale

Pilling 3-4


Fastness to light 7

Flammability AS/NZS 1530.3, BS 5852 Crib 5, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 ignition source 3

Upholstery Fabrics

Steelcut 2

Category 3

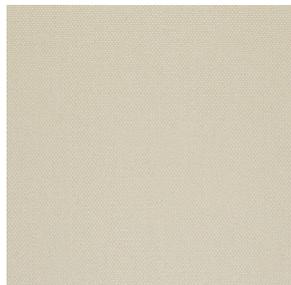

All colorways available

Textile mill Kvadrat

Composition 90% New wool (worsted), 10% Nylon

Weight 825 g/lin.m

Sustainability Complies with EU ecolabel "The Flower"

Abrasion 100.000 Martindale

Pilling 3-4


Fastness to light 6

Flammability AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, SN 198 898 5.3 with treatment, UNI 9175 1IM, US Cal.

Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 Crib 5 with treatment, NFPA 260, AS/NZS 1530.3

Steelcut Trio 3

Category 3

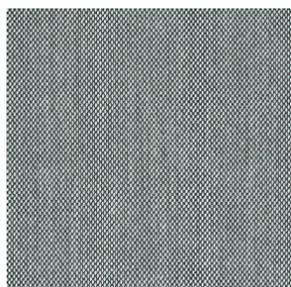

All colorways available

Textile mill Kvadrat

Composition 90% New wool (worsted), 10% Nylon

Weight 770 g/lin.m

Sustainability Complies with EU ecolabel "The Flower"

Abrasion 100.000 Martindale

Pilling 4

Fastness to light 5

Flammability AS/NZS 3837, class 2, BS 5852 part 1, EN 1021-1/2, IMO FTP Code 2010 Part 8, NF D 60 013, NFPA 260, SN 198 898 5.3 with treatment, UNI 9175

1IM, US Cal. Bull. 117-2013, ÖNORM B1/ Q1, BS 5852 Crib 5 with treatment, AS/NZS 1530.3, BS 5852 ignition source 3

Judith

Category 4



Textile mill Pierre Frey

Composition 79% Wool - 21% Cotton

Bouclé/loop pile fabric

Weight 1181 g/lm

Abrasion > 50.000 Martindale

Flammability BS5852 Cigarette & Match test - BS5852 Cigarette test - CRIB 5, in conjunction with suitable combustion modified foam - NFPA 260 - Class 1 - EN1021-1-20

Upholstery Fabrics

Some fabrics are only available in a selection of colors.

Customer's own material (COM)

Not all fabrics are suitable on SL chairs.

Customers can supply their own fabric. Fabric requirement for 1 SL chair: 1,5 rm, based on standard 140 cm wide. Prices on request.

Bulo reserves the right to reject fabrics that we find unsuitable for upholstery of SL chairs.

Warranty conditions for COM available on request.

Upholstery Leather

Sand grey



Dark green



Dark brown



Tobacco



Black



Origin European bullhides

Thickness 1.0/1.2 mm

Surface Pigmented nappa leather

Flammability BS 5852 PART 1 (ignition source 0 and 1)

EN 1021-1 and 1021-2

CAL TB 117:2013

Leather is a natural material with natural variation in color and surface structure. No two are alike. A variety of markings like healed scars and abrasions may be visible and are not considered defects but are characteristics of genuine leather.

On inquiry and at a surcharge, other leather colors than our standard colors may be available.

Customer's own leather (COL)

Customers can supply their own leather. Prices as well as leather requirements can be given on inquiry.

Only very few types of leather/qualities are suitable. Bulo reserves the right to reject the COL we find unsuitable.

Warranty conditions for COL available on request.

